


DATASHEET PELTIERELEMENT

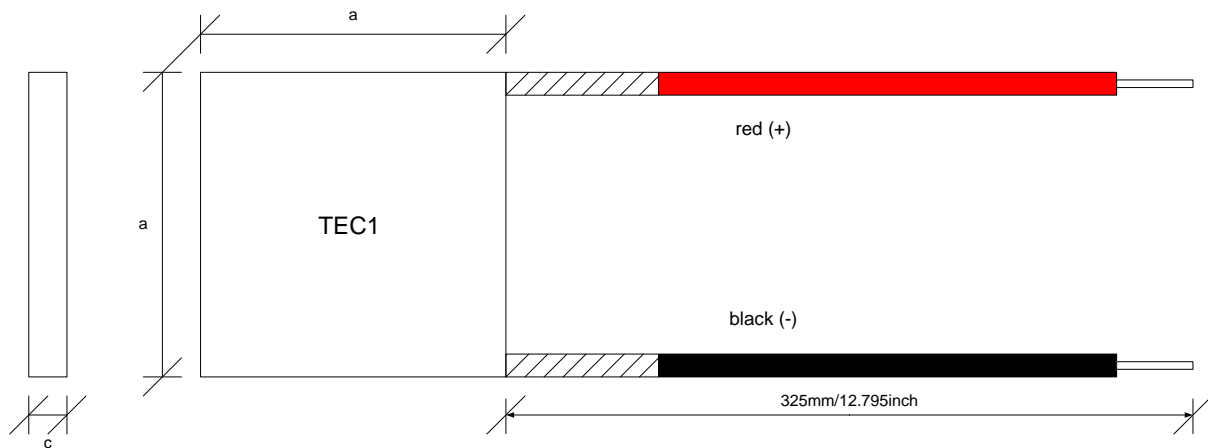

Modell	$a * a * c$ to mm/inch	Schenkel	I_{max} to A	U_{max} to V	Q_{cmax} to W $\Delta T=0$	ΔT_{max} to K $Q_{\text{c}}=0$
TEC1-12704T200	40*40*4,7/ 1.575*1.575*0.185	127	4	15,2	37,7	67,0
TEC1-12705T200	40*40*4,2/ 1.575*1.575*0.165	127	5	15,2	47,1	67,0
TEC1-12706T200	40*40*3,9/ 1.575*1.575*0.154	127	6	15,2	56,5	67,0
TEC1-12708T200	40*40*3,6/ 1.575*1.575*0.142	127	8	15,2	75,4	64,0
TEC1-12710T200	40*40*3,3/ 1.575*1.575*0.13	127	10	15,2	94,2	64,0

Temperature up to 200°C. Wires are teflon insulated.

All peltierelements are sealed.



00500 999000

